


Blood Pressure Sensors



Package A



Package M

Features

- High accuracy version
- Temperature Compensated
- Calibrated Zero and Span

Applications

- Non Invasive Medical Instrumentation


General Description

This data sheet describes several package configuration of pressure sensors for use in non invasive blood pressure measurement.

The output of the device is ratiometric to the supply voltage and is offered in both a millivolt and amplified output configuration.


Physical Dimensions

Package M

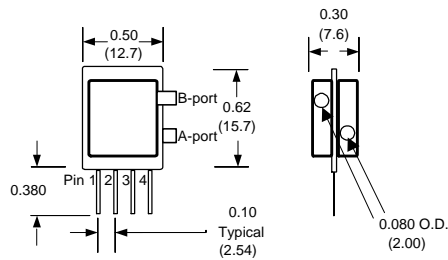

- pin 1: Vsupply**
- pin 2: Common**
- pin 3: Voutput**
- pin 4: do not connect**

- pin 1: N/C**
- pin 2: +V supply**
- pin 3: +Voutput**
- pin 4: -Vsupply**
- pin 5: -Voutput**
- pin 6: N/C**

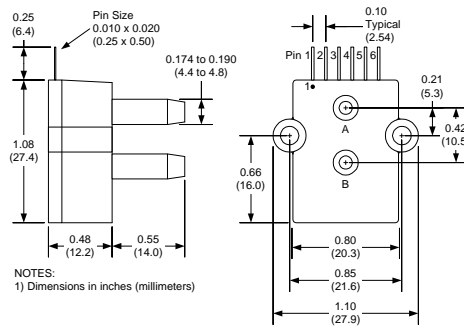

Package A

Pressure Sensor Characteristics Maximum Ratings

Supply Voltage VS	see below
Proof Pressure	1500 mmHg
Lead Temperature (soldering 2-4 sec.)	250°C

Environmental Specifications

Temperature Ranges	
Compensated	10 to 50° C
Operating	-25 to 85° C
Storage	-40 to 125° C
Humidity Limits	0 to 95% RH (non condensing)

Standard Package Types

Part Number-Side Port	Package Type	Nominal Span	Supply Voltage
BP01-D-MV	A	15 mV	12 volts
BP01-G-4V-MINI	M	4.2 volts	5 volts

Performance Characteristics for BP01-D-MV

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, gage pressure		300		mmHg
Output Span, note 4	14.85	15.0	15.15	mV
Offset Voltage @ zero pressure			±5	mmHg
Offset Temperature Shift (10°C-50°C), note 2			±0.2	mmHg/°C
Linearity, hysteresis error 0 - 200 mmHg, note 3			0.1	% fs
Linearity, hysteresis error 0 - 300 mmHg, note 3			0.2	% fs
Span Shift (10°C-50°C), note 2			±0.02	% fs/°C

Performance Characteristics for BP01-G-4V-MINI

Parameter, note 1	Minimum	Nominal	Maximum	Units
Operating Range, gage pressure		300		mmHg
Output Span, note 4	4.1	4.2	4.3	V
Offset Voltage @ zero pressure			±5	mmHg
Offset Temperature Shift (10°C-50°C), note 2			±0.2	mmHg/°C
Linearity, hysteresis error 0 - 200 mmHg, note 3			0.1	% fs
Linearity, hysteresis error 0 - 300 mmHg, note 3			0.2	% fs
Span Shift (10°C-50°C), note 2			±0.02	% fs/°C

Specification Notes

- NOTE 1: ALL PARAMETERS ARE MEASURED AT ROOM TEMPERATURE UNLESS OTHERWISE SPECIFIED. PRESSURE MEASUREMENTS ARE WITH POSITIVE PRESSURE APPLIED TO PORT B.
- NOTE 2: SHIFT IS RELATIVE TO 25°C.
- NOTE 3: MEASURED AT ONE-HALF FULL SCALE RATED PRESSURE USING BEST STRAIGHT LINE CURVE FIT.
- NOTE 4: THE VOLTAGE ADDED TO THE OFFSET VOLTAGE AT FULL SCALE PRESSURE.

All Sensors reserves the right to make changes to any products herein. All Sensors does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.